

## **MHD Flow of Stratified Incompressible Viscous Fluid Between Two Semi-Infinite Parallel Plates Partially Filled With Porous Medium**

**Dr. Shiva Shanker K<sup>1</sup>, Dr.Venumadav.K<sup>2</sup>**

*<sup>1</sup>Associate Professor, <sup>2</sup>Assistant professor*

*<sup>1,2</sup>Dept of Mathematics,*

*<sup>1,2</sup>Kakatiya Institute of Technology & Science, Warangal, Telangana, India.*

### **Abstract**

The aim of the present paper is to investigate flow of stratified incompressible viscous fluid between two semi-infinite parallel plates. The space between the parallel plates is partially filled with porous medium. The flow will be two phase flow, one in clear region and other in porous region. Transverse magnetic field is applied in the both regions perpendicular to the length of the plates. The expressions for fluid velocities in both regions obtained sophisticatedly. The effects of permeability parameter and magnetic parameter on fluid velocities are investigated. The results are graphically represented.

**Keywords:** Porous medium, two phase flow, magnetic field, permeability parameter.

### **1. INTRODUCTION:**

The study of flows through porous medium assumed importance because of the interesting applications in the diverse fields of science, Engineering and Technology. The practical applications are in the percolation of water through soil, extraction and filtration of oils from wells, the drainage of water, irrigation and sanitary engineering and also in the inter disciplinary fields such as biomedical engineering etc. The classical Darcy's law Muskat [1] states that the pressure gradient pushes the fluid against the body forces exerted by the medium which can be expressed as

$$\vec{V} = -\left(\frac{k}{\mu}\right)\nabla P .$$

The law gives good results in the situations when the flow is uni-directional or the flow is at low speed. In general, the specific discharge in the medium need not be always low. As the specific discharge increases, the convective forces get developed and the internal stress generates in the fluid due to its viscous nature and produces distortions in the velocity field. In the case of highly porous medium such as fiber glass, papus of dandelion the flow occurs even in the absence of the pressure gradient.

Modifications for the classical Darcy's law were considered by the Beavers and Joseph [2], Saffman [3] and others. A generalized Darcy's law proposed by Brinkmann [4] is given by

$$O = -\nabla P - \left(\frac{\mu}{K}\right)\vec{v} + \mu \nabla^2 \vec{v}$$

where  $\mu$  and  $K$  are coefficients of viscosity of the fluid and permeability of the porous medium.

The applications of flows through porous medium bears wide spread interest in Geophysics, biology and medicine. In many of these areas the flow consists of more than one phase, such type of flows find applications in the inter disciplinary fields such as bio-medical engineering etc., the flow of blood is one such application. The blood may be represented as Newtonian fluid and the flow of the blood is in two layered. Lightfoot [5], Shukla *et al.* [6] and Chaturani [7]. Bird *et al.* [8] found an exact solution for the laminar flow of two immiscible fluids between two parallel plates. Bhattacharya [9] discussed the flow of immiscible fluids between rigid plates with a time dependent pressure gradient. Vajravelu *et al.* [10] have discussed the effect of magnetic field on unsteady flow of two immiscible conducting fluids between two permeable beds. Transciet couette flow in a rotating non-Darcian porous medium parallel plate configuration is studied by Anwarbeg *et al.* [11] Kandryzakaria *et al.* [12] discussed magneto hydrodynamics instability of interfacial waves between two immiscible cylindrical fluids.

Earlier Narasimhacharyulu *et al.* [13] studied the problem of two phase fluid flow between parallel plates with porous lining and Narasimhacharyulu *et al.* [14] examined the flow of micropolar fluid between parallel plates coated with porous lining. Earlier Narasimhacharyulu *et al.* [16] studied the problem of two phase flow of an incompressible viscous fluid between two semi-infinite parallel plates under transverse magnetic field,

In this present paper we are considering stratified incompressible viscous fluid between two semi-infinite parallel plates. , the space between the plates is partially filled with porous medium. There exists two regions one flow in clear region and other flow in porous region. Transverse magnetic field is applied in both regions. The results are graphically represented.

## 2.MATHEMATICAL FORMULATION OF THE PROBLEM

The flow of stratified incompressible viscous fluid is considered between two semi infinite parallel plates given by  $y = \pm h$ . The space between the plates is filled with porous region of thickness ' $2\delta$ '. The space between the two plates represents flow of fluid in two phases, one in clear region and other in porous region. The Coordinate system is taken such that x-axis lies parallel to the length of the plates and y-axis perpendicular to the length of the plates. The fluid flows in the two regions under a constant pressure gradient.

$$G = -\frac{\partial p}{\partial x}$$

A transverse magnetic field is applied perpendicular to the flow of the fluid. The induced magnetic effect is negligible in comparison with the transverse magnetic field due to low magnetic Reynold's number, as a result of slightly conducting fluid [15]. Further the electric force  $E$  given by ohm's law  $J = (E + V \times B)$  when  $B = (H_0, 0, 0)$  and the electrical conductivity is assumed to be a null vector for the simplicity of the problem.

The velocity of the fluid  $\vec{V} = (u, 0, 0)$  satisfies the equation of continuity, the physical quantities depends on  $y$  only.

The equation of motion in the two regions is given by

$$\frac{d^2 u_p}{dy^2} - \frac{u_p}{k} - \frac{\sigma \beta_0^2}{\mu} u_p = -\frac{G}{\nu} e^{\beta y} \quad \dots \quad (2.1)$$

$$-\delta < y < \delta$$

$$\frac{d^2 u_c}{dy^2} - \frac{\sigma \beta_0^2}{\mu} u_c = -\frac{G}{\nu} e^{\beta y} \quad \dots \quad (2.2)$$

$$-h < y < -\delta \quad \text{and} \quad \delta < y < h$$

Where  $G = -\frac{\partial p}{\partial x}$  is a constant pressure gradient, in the x direction,  $\nu$  is coefficient of viscosity of the fluid,  $k$  is permeability of the porous medium,  $\beta$  stratification factor,  $u_p$  and  $u_c$  are velocity of the fluid in the porous and clear region respectively

using the following non-dimensional quantities.

$$u^* = \frac{uh}{\nu}, y^* = \frac{y}{h}, G^* = \frac{Gh^3}{\nu}, \beta_1^2 = \frac{h^2}{K}, M^2 = \frac{\sigma \beta_0^2 h^2}{\mu} \quad \dots \quad (2.3)$$

After removing \*, the non-dimensional form of equation of motion is

$$\frac{d^2 u_p}{dy^2} - \alpha^2 u_p = -\frac{G}{\nu}; \quad -\frac{\delta}{h} < y < \frac{\delta}{h} \quad \dots \quad (2.4)$$

$$\frac{d^2 u_c}{dy^2} - M^2 u_c = -\frac{G}{\nu}; \quad -1 < y < -\frac{\delta}{h} \quad \text{and} \quad \frac{\delta}{h} < y < 1 \quad \dots \quad (2.5)$$

where  $\alpha^2 = \beta_1^2 + M^2$ ,  $\beta_1^2 = \frac{h^2}{K}$ ,  $M^2 = \frac{\sigma \beta_0^2 h^2}{\mu}$

The boundary conditions are given by

$$\left. \begin{array}{l} u_c = u_p \quad \text{at} \quad y = \pm \frac{\delta}{h} \\ u_c = 0 \quad \text{at} \quad y = \pm 1 \end{array} \right\} \quad \dots \quad (2.6)$$

### 3. SOLUTION OF THE PROBLEM

Solving the equations (2.4) and (2.5) employing boundary conditions (2.6) we get

Velocity in clear region is given by

$$u_c = \frac{G}{\nu(\beta^2 - M^2)} \left[ \frac{\cosh \beta}{\cosh M} \cosh(My) + \frac{\sinh \beta}{\sinh M} \sinh(My) - e^{\beta y} \right] \quad \dots \dots \dots (2.7)$$

Velocity in porous region is given by

$$u_p = \frac{G}{\nu(\beta^2 - \alpha^2)} \left[ \frac{\cosh(\beta \frac{\delta}{h})}{\cosh(\alpha \frac{\delta}{h})} \cosh(\alpha y) + \frac{\sinh(\beta \frac{\delta}{h})}{\sinh(\alpha \frac{\delta}{h})} \sinh(\alpha y) - e^{\beta y} \right] + \frac{G(1 - \frac{\delta^2}{h^2})}{2\nu \cosh \alpha(\frac{\delta}{h})} \cosh(\alpha y) \quad \dots \dots \dots (2.8)$$

#### DEDUCTIONS:

MHD flow of an incompressible viscous fluid between two semi-infinite parallel plates. The space between the parallel plates is filled partially with highly porous medium. ( $\beta=0$ )

Velocity in clear region is given by

$$u_c = \frac{G}{nM^2} \left( 1 - \frac{\cosh My}{\cosh M} \right) \quad \dots \quad (2.9)$$

Velocity in porous region is given by

$$u_p = \frac{G}{\nu M^2} \left( 1 - \frac{\cosh My}{\cosh M} \right) + \frac{G}{4\nu} \alpha^2 \left( 1 - \frac{\delta^2}{h^2} \right) \left( y^2 - \frac{\delta^2}{h^2} \right) \dots \quad (2.10)$$

#### 4. RESULTS AND DISCUSSIONS

The flow of stratified incompressible viscous fluid is studied between two semi-infinite parallel plates partially filled space with porous medium. The flow is a two phase flow one in clear medium other in porous region. Transverse magnetic field is applied in both regions

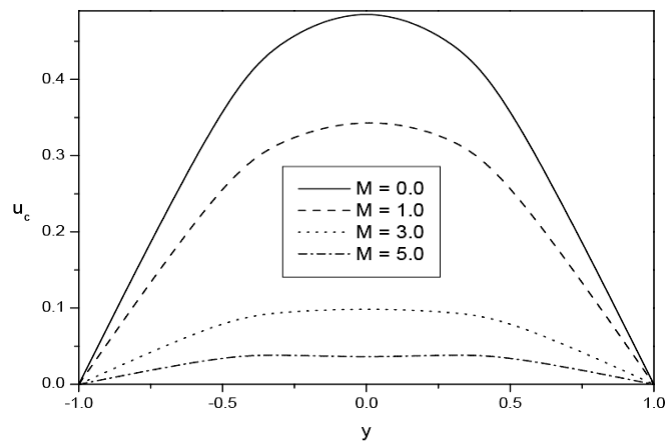


Fig. 1

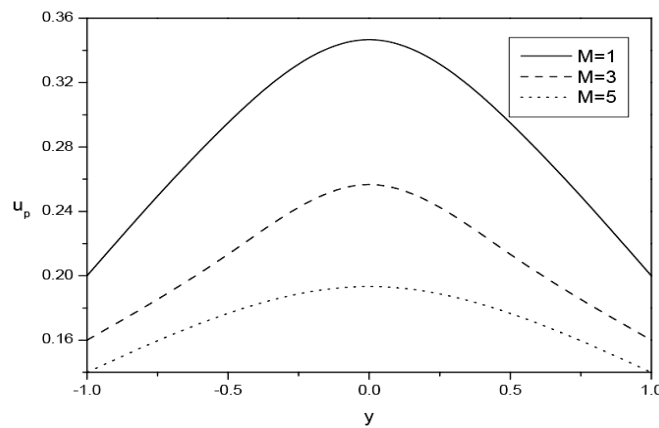
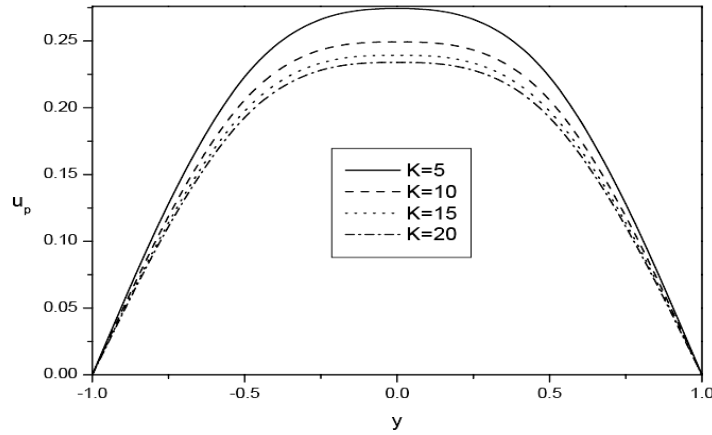


Fig. 2

Fig. 1 shows that velocity in clear medium is more parabolic when magnetic field is absent. The parabolic profile decrease with the increasing magnetic field

Fig. 2 shows the velocity in the porous medium decreasing with increasing magnetic field values



**Fig. 3**

From Fig. 3 it is observed that, the effect of the permeability of the porous medium is to decrease velocity in the porous medium with increasing value of K.

#### REFERENCES :

- [1] Muskat, M. 1937. Flow of homogeneous fluid through porous medium, Mc Graw Hill Inc., New York, 1937.
- [2] Beavers S.G. and Joseph D.D. 1967. Boundary conditions at natural permeable wall, Int. J. of Fluid Mechanics, **30**: 197-207.
- [3] Saffman P.G. 1971. On the boundary conditions at the surface of porous medium. Studies of Applied Maths, **50**: 93-101.
- [4] Brinkman H.C. 1947. The calculation of viscous force exerted by a flowing fluid on a dense swarf of particles. Jl. of Applied Science Research **27,A1**: 27-34.
- [5] Lightfoot, E.N. 1974. Transport phenomena in living system, John-Wiley and Sons, New York, 1974.
- [6] Shukla, J.B., Parihar, R.S. and Gupta, S.P., 1980. Effects of peripheral layer viscosity on blood flow through the artery with mild stenosis, Bulletin of Mathematical Biology, **42** : 797-805.

- [7] Chaturani, P. and Ponnalagar Samay R. 1985. A study of non-Newtonian aspects of blood flow through stenosed arteries and it's applications in arterial diseases. *J. Biology*, **22** : 521.
- [8] Bird, R.B., Stewart, W.E. and Lightfoot, E.N. 1960. *Transport phenomena*. John wiley and sons, Inc, New York.
- [9] Bhattacharya, 1968. The flow of immiscible fluids between rigid plates with a time dependent pressure gradient.
- [10] Vairavelu, K., Sreenadh, S. and Arunachalam, P.V. 1995. *J. Math. Analysis and Applications*, **196** : 1105.
- [11] Anwar Beg, O. Takhar, H.S., Joaquin Zueco Sajid, A. Bhargava, R. 2008. Transient couette flow in a rotating non-Darcian porous medium parallel plate configuration. *Acta Mechanica*, **200** : 129.
- [12] Kadryzakaria, Magdy A. Sirwah and Ahmed Assaf. 2008. Magneto-hydrodynamics instability of interfacial waves between two immiscible incompressible cylindrical fluids. *Acta mechanica sinica*. **24** : 497.
- [13] Narasimhacharyulu, V. 2007. Flow of a Newtonian fluid between two parallel plates with porous lining. *Bulletin of pure and Applied Sciences*. Vol. **26E(no. 1)**, 101-111.
- [14] Narasimha Charyulu, V. 2010. Laminar flow of an incompressible micropolar fluid between two parallel plates with porous lining. *Int. J. of Appl. Math. And Mech.* **6(14)**, 81-92.
- [15] Sparrow, E.M and Cess, R.D., *Trans. J. Appl. Mech.* **29** (1962) 181.
- [16] Narasimha Charyulu, V. and Shiva shanker, K. Two Phase flow of an incompressible viscous fluid between two semi-infinite parallel plates under transverse magnetic field, *International Journal of Computational and Applied Mathematics*. Vol(8), 1(2013), PP. 25-35

