

## The Experimental Research on the Formability of Low Carbon Steel Sheet

Salunkhe Ujwala Sunil<sup>1</sup> and K. Baba Pai<sup>2</sup>

<sup>1</sup>*JJT University, Jhunjhunu, Rajasthan.*

<sup>2</sup>*ITM Universe, Vadodara, Gujarat.*

### Abstract

The forming behaviour of cold rolled closed annealed steel sheet in Selected samples with proper annealing and chemical composition for better formability was investigated by Erichsen Cupping test method. The results showed that the formability of cold rolled closed annealed steel having lower percentage of carbon is lesser forming property and ductility. It was found that the stress distribution and the grain density of the sheet material confirm the formability. The best combination of strength and ductile properties has steel with the low carbon and better forming property.

**Keywords:** Formability; Low Carbon steel; re-crystallization; Mechanical properties.

### 1. Introduction

Oliveira et al. (2005) explained that Sheet metal forming processes often involve high rates of deformation. Electromagnetic pulse forming (magnetic pulse forming), hydro forming and explosive forming are obvious examples, but also in more conventional sheet forming techniques, such as deep drawing, roll forming and bending, locally high strain rates occur deviating from those used in static material tests. Mala Seth et al. (2005) reported that high velocity deformation can be quite effective in increasing the forming limits of metal sheets as well as effectively treating some other common metal forming problems, such as wrinkling and distortion. This study examines the high velocity formability of cold rolled sheet steel as developed in impact with a curved punch.

T.B. Stoughton et al. (2000) revealed a fundamental problem in sheet metal forming is fracturing. It is therefore essential to be able to predict the risk of fracture

with high accuracy. The forming limit curve (FLC) is the most commonly used fracture criterion for sheet metal forming applications. New fracture criterions have been developed but no one has yet come to general practical use in the automotive industry. In this paper, discussion about the formability of CRCA sheet for transformer radiator fin sheet is evaluated.

## 2. Experimental Details

### 2.1 Material and sample preparation

The materials used for research are CR1, CR2, CR3, and CR4. The chemical composition of these four samples tested by Spectro Chemical Analysis as per specification of Indian Standard 513 of 2008 Edition and the results are shown in Table1.

**Table 1:** The chemical composition of CRCA steel (wt. %).

CR1	Element	C	Mn	P	S
	Atomic %	0.15	1.40	0.019	0.007
CR2	Element	C	Mn	P	S
	Atomic %	0.08	0.30	0.014	0.008
CR3	Element	C	Mn	P	S
	Atomic %	0.02	0.12	0.011	0.007
CR4	Element	C	Mn	P	S
	Atomic %	0.01	0.14	0.010	0.014

High strength cold rolled steel having low carbon is continuously annealed at the temperature of 750°C to produce uniform strength. The holding time should be not less than 20 sec. The preferable range is 20 sec to 3min. CR1 is a commercial(ordinary) quality “O” grade as per Indian standard:513 2008 specifications. CR2 is a drawing quality “D” grade as per Indian standard: 513 2008 specifications. CR3 is a deep drawing Quality “DD” grade as per Indian standard: 513 2008 specifications. CR4 is an extra deep drawing quality “EDD” grade as per Indian standard: 513 2008 specifications.

### 2.2 Cupping test setup

The Cupping Testing Machine is precise technology testing machine which is used for sheet metal & strip steel rolled stock etc. It can complete test of plastic deformation and formability for sheet metal & strip steel rolled stock. It conforms to IS 513 2008. This machine is having the features like, Thickness of sheet metal: 0.2-2mm, Width of sheet metal: 90-100mm, Stroke of punch: 40mm, Max. Clamping test load: 60kN, Max. Clamping load: 25kN, Specifications of cupping grips, Standard punch ball:  $\phi 20 \pm 0.05$ mm, Standard pattern hole:  $\phi 33 \pm 0.1$ mm etc.


The Erichsen cupping test is a ductility test, which is employed to evaluate the ability of metallic sheets and strips to undergo plastic deformation in stretch forming. The test consists of forming an indentation by pressing a punch with a spherical end against a test piece clamped between a blank holder and a die, until a through crack appears. The depth of the cup is measured. The depth of cup is proportional to the formability of sheet metal. As shown in figure1, sheet metals of selected samples are clamped between blank holder and die until a crack appears. And it will indicate formability of these samples.



**Fig. 1:** Cupping Test Set- up.

### 3. Result and Discussions

#### 3.1 Microstructure of Sheet Metal

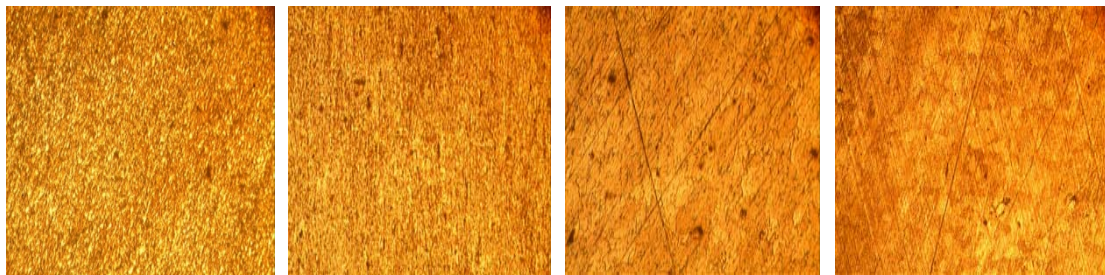

**(a)** **(b)** **(c)** **(d)**  
**Fig. 2:** Microstructure of the sample (a) CR1 (b) CR2 (c) CR3 and (d) CR4.

Coarse initial grain size had a great influence on the microstructure, hardness of low carbon steel. Grain size number below ASTM number 3 represents definitely coarse grained steel and above ASTM number 6 represents reasonably fine grained steel. Fig.2 is showing microstructure related with the samples CR1, CR2, CR3 and CR4 respectively.

Table 2 reveals the results related to the microstructure shown in Fig. 2. CR1 and CR4 are showing higher grain size compared to other samples. The samples which are higher hardness are showing less ductility

Fine grain size is also reflection of hardness. CR3 and CR4 are showing similar grain size but CR4 is having less hardness. CR4 is having better ductility compared to other two samples. Because of less grain size, CR4 is subjected to higher ductility.

**Table 2:** Grain Size and Hardness for Selected Samples.

Sr. No	Sample	Grain size	Hardness(HV5)	Structure
1	CR1	6-7	201	Ferrite and pearlite
2	CR2	6-7	109	Ferrite and pearlite
3	CR3	4-5	89	Ferrite and pearlite
4	CR4	4-5	88	Ferrite and pearlite

For ensuring the formability of selected samples, the cupping test was performed which showed different results for different samples as discussed under.

### 3.2 Forming Behaviour of CRCA Sheet Metal

With the help of cupping testing machine, forming behaviour of CRCA sheet metal of different samples is evaluated. The results obtained through this test are shown in table3.


**Table 3:** Cupping test results for Selected Samples.

Sr. No.	Samples	Depth of Cup(mm)
1	CR1	10.75
2	CR2	12.50
3	CR3	12.70
4	CR4	13.50

According to testing method of IS-10175 Part-1:1993, the sheet metal specimen in the form of strip is inserted into the test cylinder and centralized by locating diagonally. The sheet holder force of 10 kN (in accordance with the refer. standard) is adjusted using a special regulating valve, and the actual cupping process is initiated by selecting the standardized drawing speed on the speed regulator. Since the testing machine is equipped with the function "automatic stop at specimen failure" the forward speed is automatically stopped when the crack occurs, so that in any case an objective test result is achieved. The cupping value is displayed with an accuracy of 0.01 mm on the digital counter.

After performing the cupping test as shown in Fig. 3, the depth of cup for specimen CR4 is 13.50mm which is higher than other samples. And this is the indication of higher formability. As the material of CR1 is hard as described earlier after performing cupping test, crack appears at a depth of 10.75mm that is having less formability. CR1 is hard compared to other material as it is having high percentage of carbon. If this material is compared with all three materials, this material (CR1) is not desirable.

As CRCA material is used for transformer radiator fin sheet forming and automobile industry in which car body is manufactured. For such application formability of material is having vital role. Because of Enrichsen cupping, it easy to evaluate the formability of cold rolled and closed annealed sheet metal of various grads. After performing the cupping test, CR4 is showing excellent formability which will be desirable material for given application.

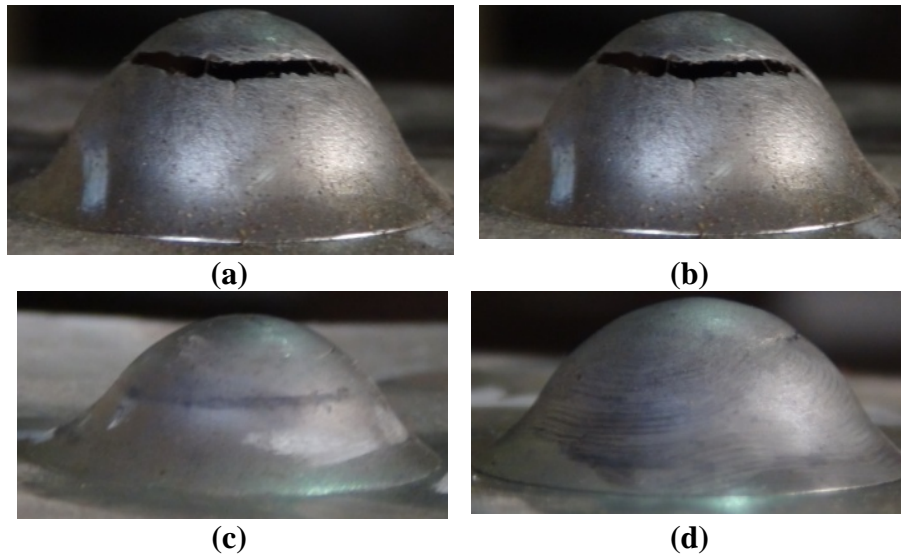

**Fig. 3:** Specimen after Test (a) CR1, (b) CR2, (c) CR3, (d) CR4

#### 4. Conclusion

1. Carbon percentage is less in CR4 other than three samples because of less grain in unit area as compared to other three samples.
2. The grain size of CR4 material is smaller than the other steels indicating bigger size of grain with low grain boundary area making the material ductile with less weak spots.
3. Large surface area of grain and less boundary area confirm that CR4 is more soft and ductile in nature as compared to other three samples.
4. Fine grain structures give more grain boundaries and hence development of internal stress whereas a CR4 has better stress relief property because of less number of grains.
5. Better formability in CR4 as compared to other three samples and therefore more depth in forming can be achieved.

#### References

- [1] Mala Seth, Vincent J. Vohnout, Glenn S. Daehn, Formability of steel sheet in high velocity impact, *Journal of Materials Processing Technology* 168 (2005) 390–400.

- [2] Oliveira, D.A., Worswick, M.J., Finn, M., Newman, D., 2005. Electromagnetic forming of aluminium alloy sheet: free-form and cavity fill experiments and model. *J. Mater. Process. Technol.* 170, 350–362.
- [3] T.B. Stoughton, A general forming limit criterion for sheet metal forming, *Int. J. Mech. Sci.* 42 (2000) 1–27.)